

# ***SPECIFICATIONS***

FOR TOPLITE COB MODULE

**MODEL: ATE-R11-3W**



**TOPLITE**

**TOPLITE INTERNATIONAL LLC.**


*[www.topliteusa.com](http://www.topliteusa.com)*





# TECHNICAL DATA SHEET

**ATE-R11-3W** <TOPLITE COB MODULE>

## 1. PRODUCT APPEARANCE

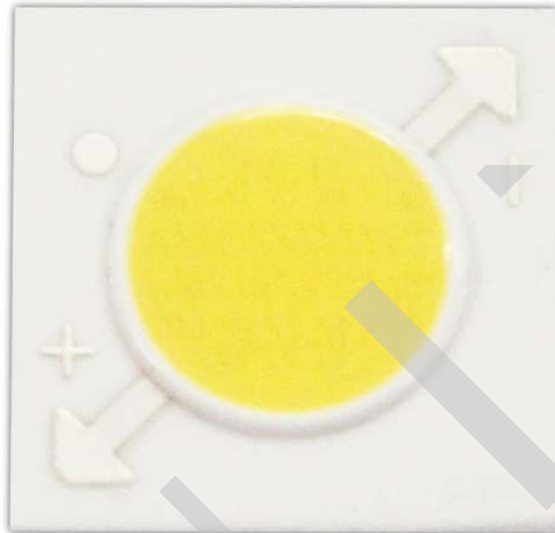

## 2. OUTLINE DRAWING

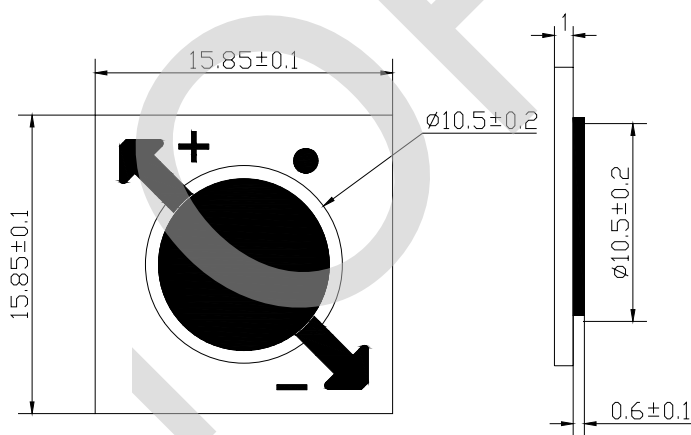

Unit: mm

Tolerance: ±0.25

**TECHNICAL DATA SHEET****ATE-R11-3W** <TOPLITE COB MODULE>

2 / 9

**3. PERFORMANCE PARAMETERS****3-1. ABSOLUTE MAXIMUM RATINGS**

ITEM	SYMBOL	RATING	UNIT
Power Dissipation	P	4.75	W
Forward Current	I <sub>F</sub>	120	mA
Reverse Voltage	V <sub>R</sub>	60	V
Operating Temperature	T <sub>opr</sub>	- 30 ~ + 85	°C
Storage Temperature	T <sub>stg</sub>	- 40 ~ + 100	°C
Junction Temperature	T <sub>jmax</sub>	110	°C

**Note:**\*1. Forward Current allows maximum surge current  $\leq 10$ ms.

\*2. Power dissipation and forward current are the values when the LED is used within the range of the derating curve in this data sheet.



**TECHNICAL DATA SHEET**

**ATE-R11-3W** <TOPLITE COB MODULE>

**3-2. ELECTRICAL-OPTICAL CHARACTERISTICS**

(T<sub>c</sub>=25°C)

**	PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
common	Forward Voltage *1	V <sub>F</sub>	I <sub>F</sub> =80mA	34.8	36	39.6	V	
	Beam Angle	—		—	120	—	Deg	
W	** Color Temp.	—	I <sub>F</sub> =80mA	2870	3045	3220	K	
	** Color Rendering Index *3	R <sub>a</sub>		80	—	—	—	
	W <sub>1</sub>	Luminous Flux *2		Φ	259	274	—	lm
		Luminous Efficiency		η	90	95	—	lm/W
	W <sub>2</sub>	Luminous Flux *2		Φ	288	305	—	lm
		Luminous Efficiency		η	100	105	—	lm/W
D	** Color Temp.	—	I <sub>F</sub> =80mA	4745	5028	5311	K	
	** Color Rendering Index *3	R <sub>a</sub>		80	—	—	—	
	D <sub>1</sub>	Luminous Flux *2		Φ	288	302	—	lm
		Luminous Efficiency		η	100	105	—	lm/W
	D <sub>2</sub>	Luminous Flux *2		Φ	317	331	—	lm
		Luminous Efficiency		η	110	115	—	lm/W
C	** Color Temp.	—	I <sub>F</sub> =80mA	6020	6530	7040	K	
	** Color Rendering Index *3	R <sub>a</sub>		80	—	—	—	
	C <sub>1</sub>	Luminous Flux *2		Φ	317	331	—	lm
		Luminous Efficiency		η	110	115	—	lm/W
	C <sub>2</sub>	Luminous Flux *2		Φ	346	360	—	lm
		Luminous Efficiency		η	120	125	—	lm/W

(Note) Parameters is formulated based on shipping samples

\*1. After 20 ms drive, Measurement tolerance: ± 3 %

\*2. Monitored by TOPLITE's 1m integrating sphere, after 20 ms drive, Measurement tolerance: ± 10 %

\*3. Monitored by TOPLITE's 1m integrating sphere, after 20 ms drive, Measurement tolerance: ± 2




# TECHNICAL DATA SHEET

**ATE-R11-3W** <TOPLITE COB MODULE>

## 3-3. Characteristics diagram (TYP.)


Forward Current Vs. Relative Luminous Flux

$T_c = 25^\circ\text{C}$

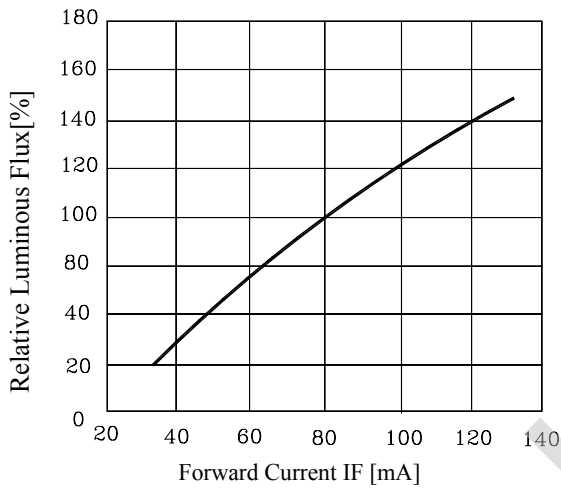


Forward Voltage Vs. Forward Current

$T_c = 25^\circ\text{C}$

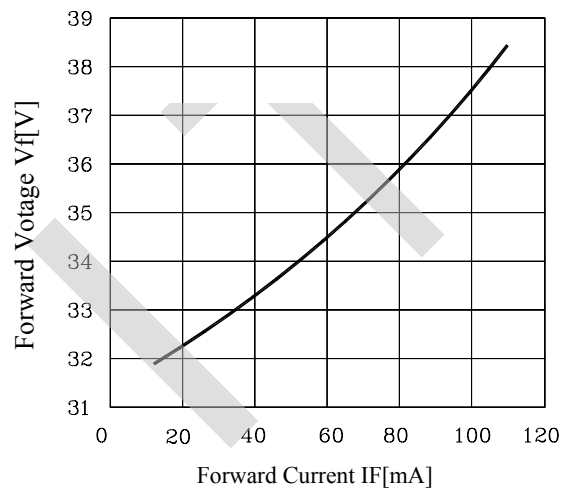


Case Temperature Vs. Relative Luminous Flux

$I_f = 80\text{mA}$

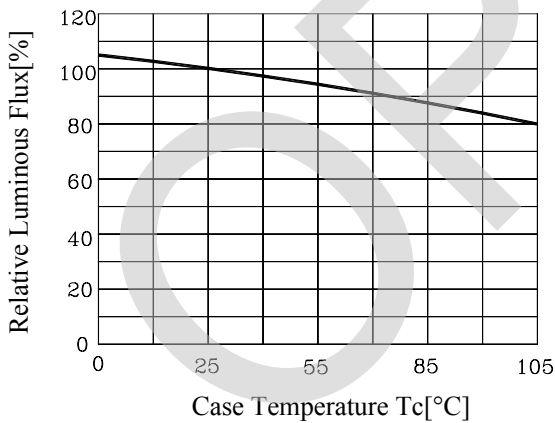

Case Temperature Vs. Forward Voltage

$I_f = 80\text{mA}$

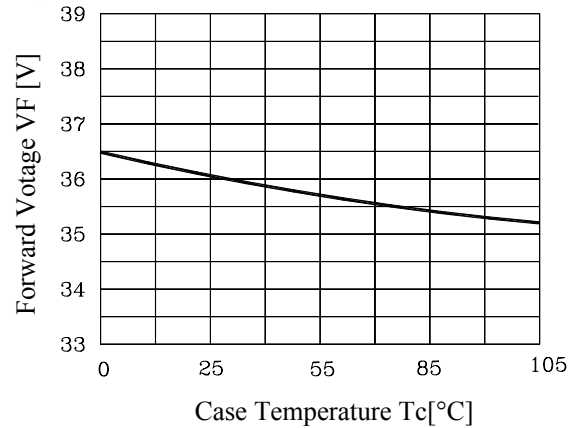

**TECHNICAL DATA SHEET****ATE-R11-3W** <TOPLITE COB MODULE>

5 / 9

**4. RELIABILITY**

The reliability of products shall be satisfied with items listed below.

**4-1. TEST ITEMS AND TEST CONDITIONS**

NO.	TEST ITEM	TEST CONDITIONS	RESULT
1	Continuous operation test	$T_a = 25^{\circ}\text{C}$ , $I_F = 80\text{mA}$ $\times$ 1000 hours(with Al fin)	PASS
		$T_a = 80^{\circ}\text{C}$ , $T_j = 120^{\circ}\text{C}$ , $I_F = 80\text{mA}$ $\times$ 1000 hours(with Al fin)	
2	Low temperature storage	$T_a = -40^{\circ}\text{C}$ $\times$ 1000 hours	PASS
3	High temperature storage	$T_a = 100^{\circ}\text{C}$ $\times$ 1000 hours	PASS
4	Moisture resistance	$T_a = 60^{\circ}\text{C}$ , 90%RH for 1000 hours	PASS
5	Thermal shock	$T_a = -40^{\circ}\text{C}$ $\times$ 30minutes $\sim$ $100^{\circ}\text{C}$ $\times$ 30minutes, 100 cycle	PASS

**4-2. FAILURE CRITERIA**

NO.	PARAMETER	SYMBOL	FAILURE CRITERIA
1	Forward Voltage	$V_F$	$V_F > \text{Initial value} \times 1.1$
2	Luminous Flux	$\Phi$	$\Phi < \text{Initial value} \times 0.7$



**TECHNICAL DATA SHEET**

**ATE-R11-3W** <TOPLITE COB MODULE>

**5. CHROMATICITY COORDINATES REGIONAL**

**5-1. 3000K CHROMATICITY COORDINATES**


(Tolerance:  $x,y \pm 0.005$ )

( $I_f = 80\text{mA}, T_c = 25^\circ\text{C}$ )

Range	Chromaticity coordinates					
		NO.1	NO.2	NO.3	NO.4	CENTER
	x	0.4562	0.4299	0.4147	0.4373	0.4338
	y	0.4260	0.4165	0.3814	0.3893	0.4030

\* The percentage of each rank in the shipment shall be determined by TOPLITE.

**Chromaticity Diagram**

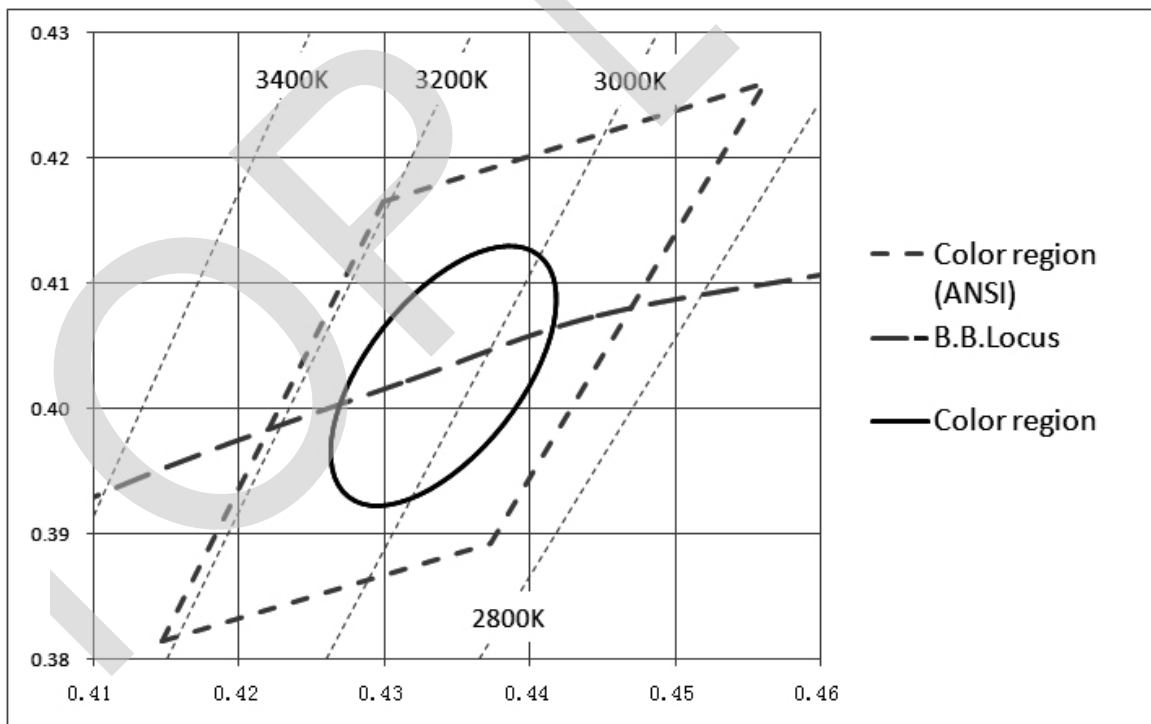

**Note: The tolerance of measurement at our tester is  $V_f \pm 3\%$  ,  $D_v \pm 10\%$  , Chromaticity( $x,y$ ) $\pm 0.005$ .**



**TECHNICAL DATA SHEET**

**ATE-R11-3W** <TOPLITE COB MODULE>

**5-2. 5000K CHROMATICITY COORDINATES**


(Tolerance:  $x,y \pm 0.005$ )

( $I_f = 80\text{mA}$ ,  $T_c = 25^\circ\text{C}$ )

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	CENTER
	<b>x</b>	0.3551	0.3376	0.3366	0.3515	0.3447
	<b>y</b>	0.3760	0.3616	0.3369	0.3487	0.3553

\* The percentage of each rank in the shipment shall be determined by TOPLITE.

**Chromaticity Diagram**

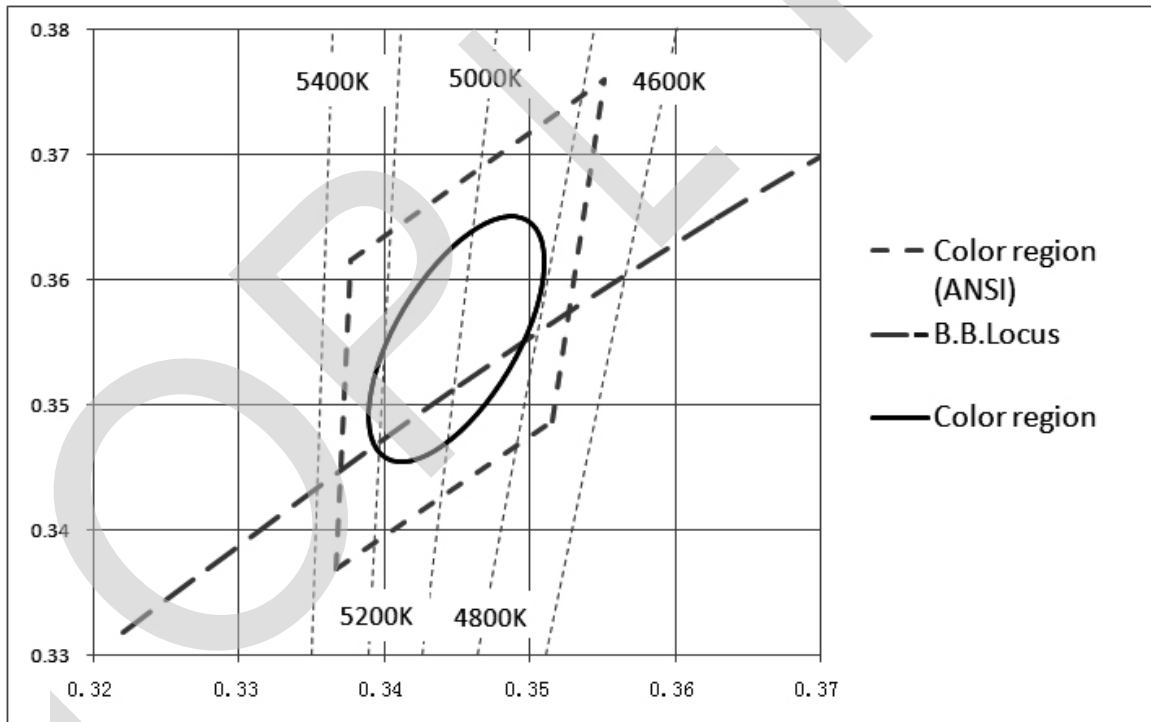

**Note:** The tolerance of measurement at our tester is  $V_f \pm 3\%$  ,  $D_v \pm 10\%$  , Chromaticity( $x,y$ ) $\pm 0.005$ .





**TECHNICAL DATA SHEET**

**ATE-R11-3W** <TOPLITE COB MODULE>

**5-3. 6500K CHROMATICITY COORDINATES**


(Tolerance: x,y ± 0.005)

(I<sub>F</sub> =80mA, T<sub>c</sub>= 25°C)

Range		Chromaticity coordinates				
		NO.1	NO.2	NO.3	NO.4	CENTER
	x	0.3205	0.3028	0.3068	0.3221	0.3123
	y	0.3481	0.3304	0.3113	0.3261	0.3238

\* The percentage of each rank in the shipment shall be determined by TOPLITE.

**Chromaticity Diagram**

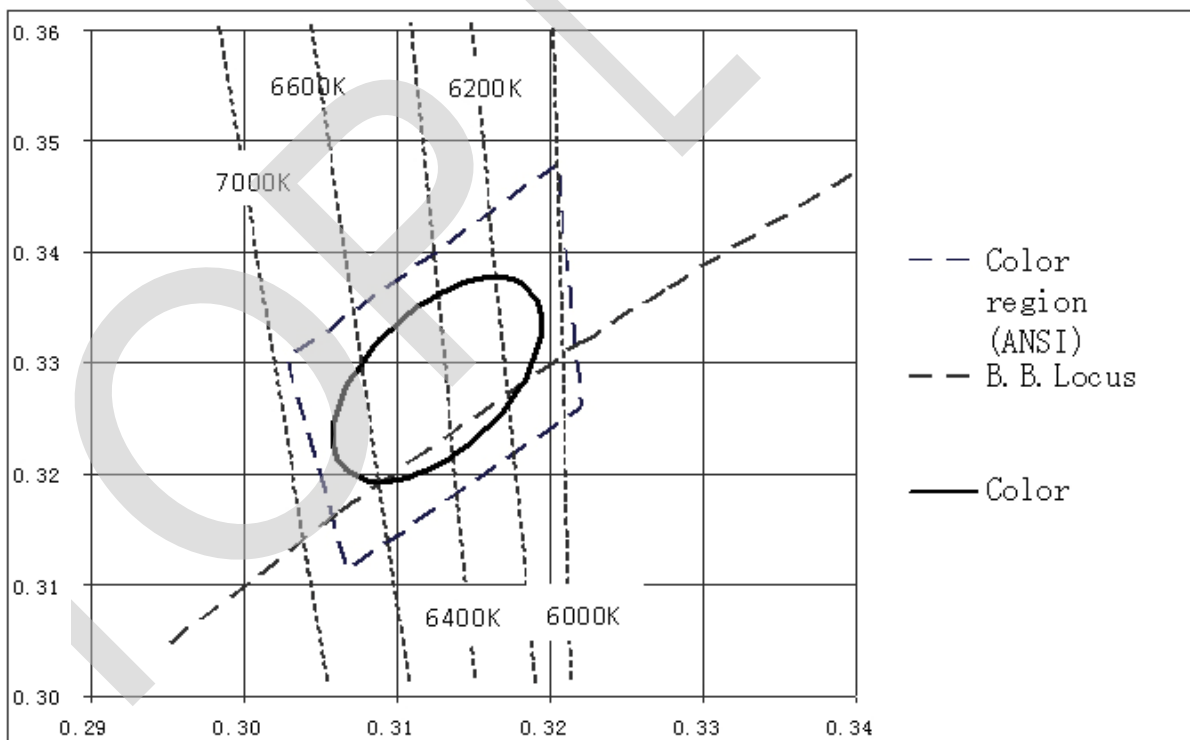

**Note: The tolerance of measurement at our tester is VF±3% , Dv±10% , Chromaticity(x,y)±0.005.**



## TECHNICAL DATA SHEET

**ATE-R11-3W** <TOPLITE COB MODULE>

### 6. USE STANDARD & PRECAUTIONS

**Before use TOPLITE COB product, carefully read the specifications;**

Handling with care for this product

Never touch the optical surface with finger or sharp object. The LED surface could be soiled or damaged, which could affect the optical performance of the LED.

Do not apply direct pressure on the optical surface.

Do not touch the resin with tweezers to avoid scratching or other damage.

In work environment, please keep handling the LEDs with appropriate ESD grounding. because this is a semiconductor product.

Please take adequate measures to prevent any static electricity being produced:such as the wearing of a wristband or anti-static gloves when handling this product.

