

# SPECIFICATIONS

LED Lamps **发光二极管产品规格书**

# TOPLITE



**MODEL: TOP-1003U10W26C**

**上海鼎晖科技股份有限公司**

SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.

[www.ledtoplight.com.cn](http://www.ledtoplight.com.cn)

[www.ledtoplite.com](http://www.ledtoplite.com)



## TECHNICAL DATA SHEET

### TOP-1003U10W26C

<FOR 10.0MM ROUND TYPE LED LAMP >

1 / 7

#### 1. FEATURES

- ※ Round type.
- ※ Low power requirement,
- ※ High reliability and a broad range of colors and packages.
- ※ Pb free.
- ※ RoHS compliant.

#### 2. DESCRIPTION

- ※ These devices are designed from advanced optical grade epoxy, which provide superior high temperature performance and excellent moisture resistance.
- ※ The LED lamps are available with different colors, intensities.

#### 3. APPLICATION

- ※ Indicator.
- ※ TV set.
- ※ Auto.
- ※ Monitor

PART NO.	SIZE	CHIP EMITTED COLOR	FACE COLOR
TOP-1003U10W26C	10.0mm Round Type	White	Water Clear


## TECHNICAL DATA SHEET

TOP-1003U10W26C

<FOR 10.0MM ROUND TYPE LED LAMP >

2 / 7

### 4. PACKAGE DIMENSIONS & CIRCUIT DIAGRAM

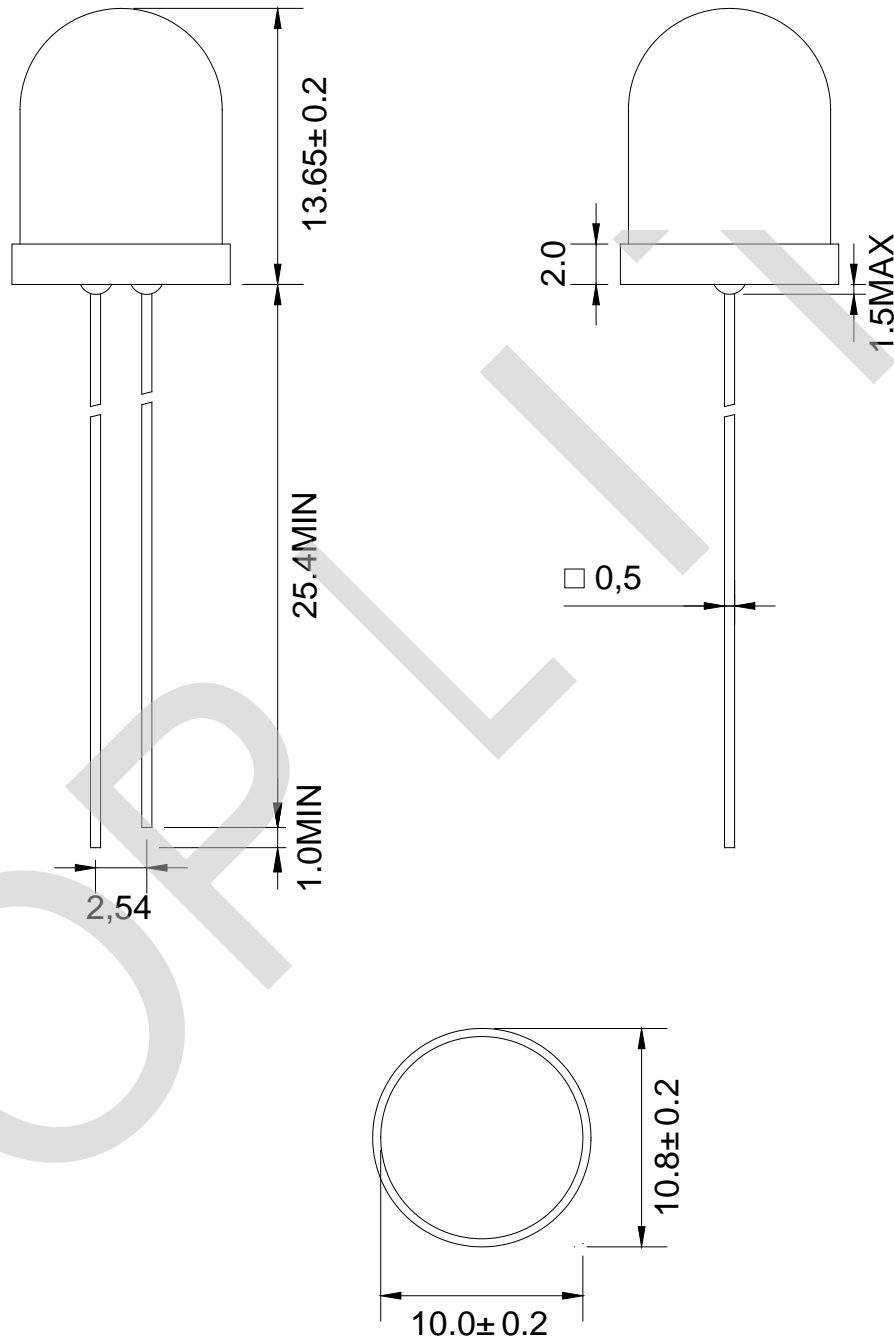

**TECHNICAL DATA SHEET****TOP-1003U10W26C**

&lt;FOR 10.0MM ROUND TYPE LED LAMP &gt;

3 / 7

**5. ELECTRICAL/OPTICAL CHARACTERISTIC****5-1. ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_R$	5	V/seg
Forward Current	$I_F$	30	mA/seg
Peak Forward Current (1/10 Duty Cycle)	$I_{PEAK}$	150	mA/seg
Power Dissipation	$P_D$	80	mW/seg
Operating Temperature Range	$T_A$	- 40 ~ + 85	°C
Storage Temperature Range	$T_{STG}$	- 40 ~ + 85	°C
Solder Temperature	$T_{sol}$	260/3	°C/s



## TECHNICAL DATA SHEET

## TOP-1003U10W26C

&lt;FOR 10.0MM ROUND TYPE LED LAMP &gt;

4 / 7

## 5-2. ELECTRICAL/OPTICAL CHARACTERISTICS (Ta=25°C)






PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS	
Luminous Intensity	I <sub>v</sub>	M	6145	7066	7987	mcd	I <sub>F</sub> =20mA
		N	7988	9185	10383		
		P	10384	11941	13499		
Forward Voltage	V <sub>F</sub>	2.80	3.20	3.60	v	I <sub>F</sub> =20mA	
Viewpoint	2θ <sub>1/2</sub>	-	22	-	deg	I <sub>F</sub> =20mA	
Color Temperature	T <sub>c</sub>	4600	-	15000	K	I <sub>F</sub> =20mA	
Color coordinates	X Axis	0.264	-	0.361		I <sub>F</sub> =20mA	
	Y Axis	0.248	-	0.385			
Luminous Flux	Φ	-	3.140	-	lm	I <sub>F</sub> =20mA	
Luminous Efficiency	η	-	50.00	-	lm/W	I <sub>F</sub> =20mA	
Spectral Line Half-Width	Δλ	-	30	-	nm	I <sub>F</sub> =20mA	
Reverse Current	I <sub>R</sub>	-	-	10	uA	V <sub>R</sub> =5V	

**TECHNICAL DATA SHEET**

**TOP-1003U10W26C**

<FOR 10.0MM ROUND TYPE LED LAMP >

**5-3. ELECTRICAL/OPTICAL CHARACTERISTIC CURVES**

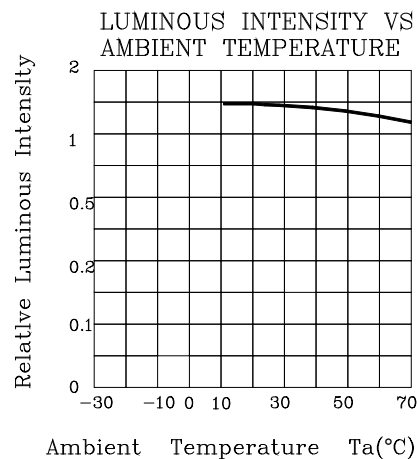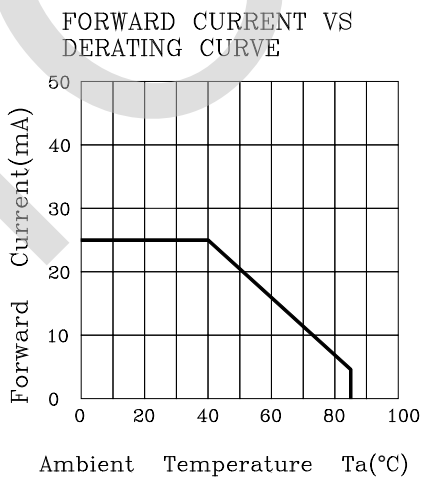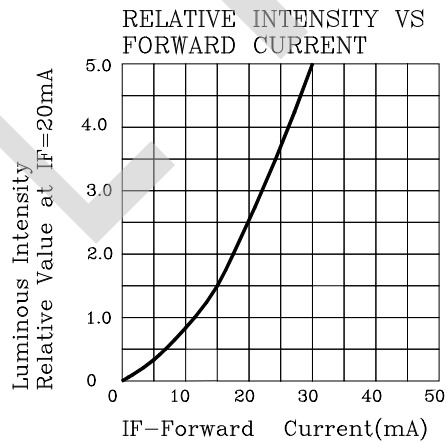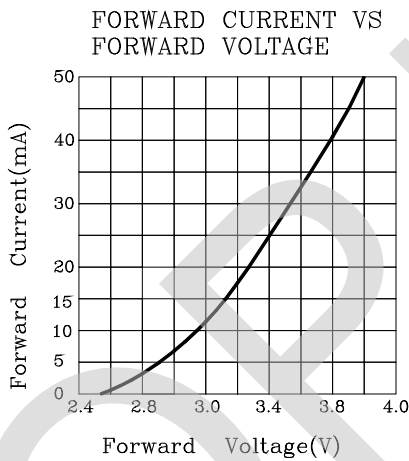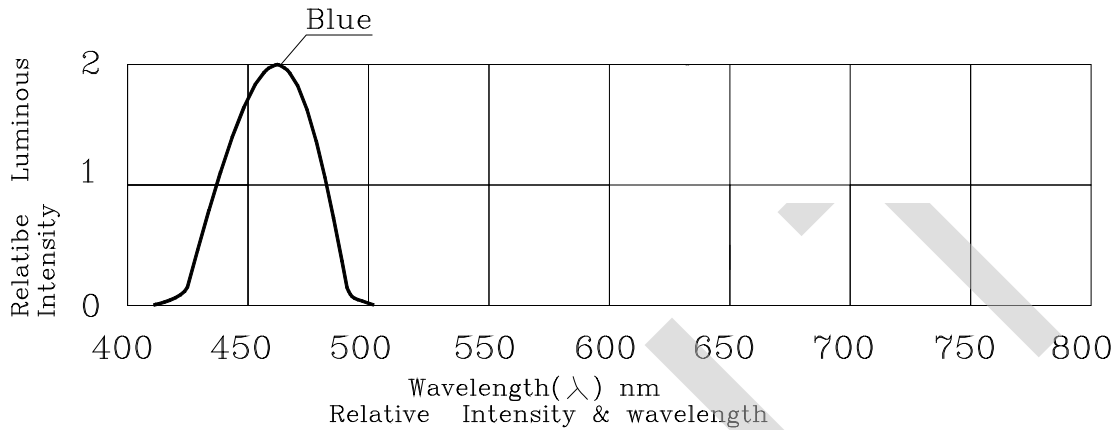

**TECHNICAL DATA SHEET**

**TOP-1003U10W26C**

**<FOR 10.0MM ROUND TYPE LED LAMP >**

**6. QUALITY CONTROL AND ASSURANCE**

CLASSIFICATION	TEST ITEM	TEST CONDITION
ENDURANCE TEST	OPERATION LIFE	Ta=under room temperature If=12mA-25mA per segment or Ip=80mA/duty=1/8,Pw=1.25mS Ip=160mA/duty=1/16,Pw=1.mS(DOT) Test time=1000HRS(-24HRS+72HRS)
	MOISTURE	Ta=65°C±5°C RH=90-95% Test time=240HRS±2HRS
	HIGH TEMPERATURE HIGH HUMIDITY REVERSE BIAS	Ta=65°C±5°C RH=90-95% VR=5V Test time=500hrs(-24HRS+48HRS)
	HIGH TEMPERATURE STORAGE	To evaluate device's durability for long term storage in high temperature Ta=85°C±5°C Test time=1000HRS(-24HRS+72HRS)
	LOW TEMPERATURE STORAGE	Ta=-35°C±5°C Test time=1000HRS(-24HRS+72HRS)
ENVIRONMENTAL TEST	TEMPERATURE CYCLING	Ta=85°C~25°C~-35°C time=30min 5min 30min 5min Cycle test:10cycles
	THERMAL SHOCK	Ta=85°C±5°C~-35°C±5°C time=10min 10min Cycle test:10cycles
	SOLOER RESISTANCE	T.sol=260°C±5°C time=10±1sec
	SOLOER ABILITY	T.sol=230°C±5°C time=5±1sec

**TECHNICAL DATA SHEET****TOP-1003U10W26C**

&lt;FOR 10.0MM ROUND TYPE LED LAMP &gt;

7 / 7

**7. SOLDERING CONDITIONS**


The recommended conditions for soldering are as follows.

Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.

**7-1. Manual Soldering Conditions(with 1.5mm Iron tip ).**

Iron Tip Temperature: 350°C Max, Time: 3s Max.

Position: The iron should be situated at least 2mm away from the root of the leads.

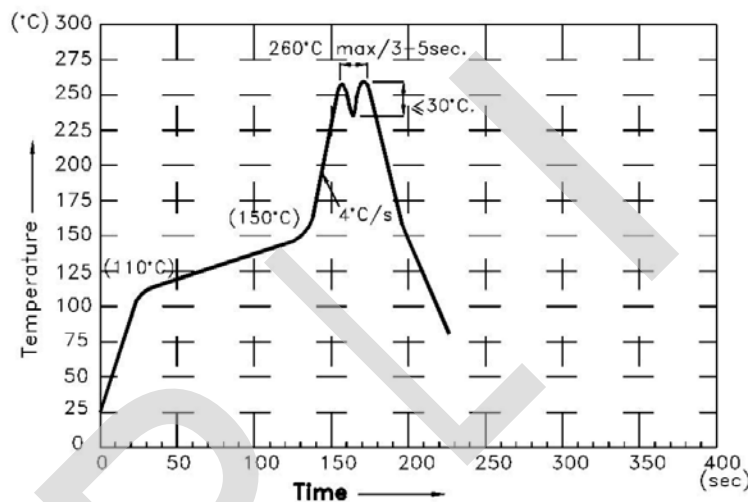**7-2. Through the Wave Soldering Conditions Wave Soldering Profile For Lead-free Through-hole LED.****7-3. Soldering General Notes:**

- Recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- After soldering, least three minutes for the component to cool to room temperature before further operations.
- If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with for compatibility.